


SITE LOCATION MAP  
SCALE: 1" = 1,500'

### GENERAL CONSTRUCTION NOTES

- ALL CONSTRUCTION SHALL COMPLY WITH LOCAL MUNICIPALITY AND COUNTY CODES AND STANDARDS. ALL CONSTRUCTION SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE OSHA, FEDERAL, STATE AND LOCAL REGULATIONS.
- THE CONTRACTOR SHALL OBTAIN ALL NECESSARY CONSTRUCTION PERMITS REQUIRED TO PERFORM ALL THE WORK. THE CONTRACTOR SHALL POST ALL BONDS, PROVIDE PROOF OF INSURANCE AND PROVIDE TRAFFIC CONTROL NECESSARY FOR THIS WORK.
- THE CONTRACTOR SHALL VERIFY ALL SITE CONDITIONS IN THE FIELD AND CONTACT THE OWNER IF THERE ARE ANY QUESTIONS OR CONFLICTS REGARDING THE CONSTRUCTION DOCUMENTS AND/OR FIELD CONDITIONS SO THAT APPROPRIATE REVISIONS CAN BE MADE PRIOR TO CONSTRUCTION. ANY CONFLICT BETWEEN DRAWINGS AND THE SPECIFICATIONS SHALL BE CONFIRMED WITH THE CONSTRUCTION MANAGER PRIOR TO BIDDING.
- SHOULD ANY UNCHARTED, OR INCORRECTLY CHARTED, EXISTING PIPING OR OTHER UTILITY BE UNCOVERED DURING EXCAVATION, CONSULT THE ENGINEER AND THE ARCHITECT IMMEDIATELY BEFORE PROCEEDING FURTHER WITH THE WORK IN THIS AREA.
- DO NOT INTERRUPT EXISTING UTILITIES SERVICING FACILITIES OCCUPIED AND USED BY THE OWNER OR OTHERS DURING OCCUPIED HOURS EXCEPT WHEN SUCH INTERRUPTIONS HAVE BEEN AUTHORIZED IN WRITING BY THE OWNER, LOCAL MUNICIPALITY AND/OR UTILITY COMPANY. INTERRUPTIONS SHALL ONLY OCCUR AFTER ACCEPTABLE TEMPORARY OR PERMANENT SERVICE HAS BEEN PROVIDED.
- THE CONTRACTOR SHALL ABIDE BY ALL OSHA, FEDERAL, STATE AND LOCAL REGULATIONS WHEN OPERATING CRANES, BOOMS, HOISTS, ETC. IN CLOSE PROXIMITY TO OVERHEAD ELECTRIC LINES. IF CONTRACTOR MUST OPERATE EQUIPMENT CLOSE TO ELECTRIC LINES, CONTACT THE POWER COMPANY TO MAKE ARRANGEMENTS FOR PROPER SAFEGUARDS.
- THE CONTRACTOR SHALL RESTORE ANY STRUCTURES, PIPE, UTILITY, PAVEMENT, CURBS, SIDEWALKS, LANDSCAPED AREAS, ETC. WITHIN THE SITE OR ADJOINING PROPERTIES DISTURBED DURING DEMOLITION OR CONSTRUCTION TO THEIR ORIGINAL CONDITION OR BETTER, AND TO THE SATISFACTION OF THE OWNER AND LOCAL MUNICIPALITY. ALL COSTS TO COMPLETE THIS WORK SHALL BE INCLUDED IN THE BASE BID FOR THIS PROJECT.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO INSTALL AND MAINTAIN TRAFFIC DEVICES FOR PROTECTION OF PEDESTRIANS AND VEHICLES CONSISTING OF DRUMS, BARRIERS, SIGNS, LIGHTS, FENCES AND UNIFORM TRAFFIC CONTROLLERS IN ACCORDANCE WITH THE STATE DEPARTMENT OF TRANSPORTATION OR AS REQUIRED OR DIRECTED BY THE SITE ENGINEER OR CONSTRUCTION MANAGER OR LOCAL GOVERNING AUTHORITIES. CONTRACTOR SHALL MAINTAIN ALL TRAFFIC LANES AND PEDESTRIAN WALKWAYS AT ALL TIMES UNLESS WRITTEN APPROVAL FROM THE DEPARTMENT OF TRANSPORTATION, LOCAL MUNICIPALITY, COUNTY, OR OTHER GOVERNING AUTHORITY IS RECEIVED.
- THE CONTRACTOR SHALL NOTIFY THE ENGINEER SHOULD ANY DISCREPANCY REGARDING THE PROPOSED WORK OR UNFORESEEN CONDITIONS ARISE PRIOR TO PROCEEDING FURTHER WITH THE AFFECTED WORK.
- THE CONTRACTOR SHALL PROVIDE AS-BUILT RECORDS OF ALL CONSTRUCTION (INCLUDING UNDERGROUND UTILITIES) TO THE OWNER AND THE ARCHITECT FOLLOWING COMPLETION OF CONSTRUCTION ACTIVITIES.
- REFER TO DETAIL SHEETS FOR EROSION AND SEDIMENT CONTROL, STORM DRAINAGE, UTILITY, PAVING, CURBING, SIGNAGE, AND RETAINING WALL DETAILS AS APPLICABLE.
- PAVEMENT MARKINGS SHALL BE IN ACCORDANCE WITH DEPARTMENT OF TRANSPORTATION GUIDELINES AND SHALL BE EITHER COLD LAID THERMOPLASTIC TAPE OR PAINTED AS DESIGNATED ON THE PLANS OR PAVEMENT MARKING DETAILS.
- SITE DIMENSIONS ARE REFERENCED TO THE FACE OF CURBS OR EDGE OF PAVING UNLESS OTHERWISE NOTED. ALL BUILDING DIMENSIONS ARE REFERENCED TO THE OUTSIDE FACE OF THE STRUCTURE UNLESS OTHERWISE NOTED.
- ALL PAVING MATERIALS FURNISHED AND WORK COMPLETED SHALL BE IN STRICT ACCORDANCE WITH THE STATE DEPARTMENT OF TRANSPORTATION GUIDELINES UNLESS OTHERWISE SPECIFIED.
- THE CONTRACTOR IS RESPONSIBLE FOR THE REMOVAL AND DISPOSAL OF ALL RUBBISH, TRASH, DEBRIS, AND ORGANIC MATERIAL IN A LAWFUL MANNER.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING ALL DIMENSIONS FOR BUILDING, WALLS, CONCRETE SLABS, AND UTILITY SERVICE POINT CONNECTIONS AND NOTIFYING THE OWNER AND ENGINEER OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL REFERENCE BUILDING CONSTRUCTION PLANS FOR EXACT LOCATIONS OF ALL UTILITY CONNECTIONS TO BUILDINGS AND DOOR STEP LOCATIONS.
- PIPE BOLLARDS SHALL BE INSTALLED IN TRAFFIC AND LOADING AREAS AS REQUIRED TO PROTECT BUILDING CORNERS, RECEIVING AREAS, HYDRANTS, TRANSFORMERS, METERS, GENERATORS, COMPACTORS, STEPS, AND RAILINGS, AS NECESSARY.
- THE OWNER, AT THEIR DISCRETION, RESERVES THE RIGHT TO MODIFY THE DETAILS AND STANDARDS OF CONSTRUCTION FOR ALL PRIVATE FACILITIES FROM THAT INDICATED ON THE APPROVED PLAN, PROVIDED THAT THE ALTERNATE STANDARD COMPLIES WITH LOCAL CODE AND/OR UTILITY COMPANY REQUIREMENTS AND THE GENERAL DESIGN INTENT OF THE PROJECT IS NOT COMPROMISED.
- THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF ALL PRODUCTS, MATERIALS AND PLAN SPECIFICATIONS TO THE OWNER AS REQUIRED FOR REVIEW AND APPROVAL, PRIOR TO FABRICATION OR DELIVERY TO THE SITE. ALLOW A MINIMUM OF 14 WORKING DAYS FOR REVIEW.
- THE CONTRACTOR SHALL REFERENCE ARCHITECTURAL PLANS FOR EXACT DIMENSIONS AND CONSTRUCTION DETAILS OF THE BUILDING, ROOF DRAINS, AND CONCRETE SIDEWALKS.
- TRAFFIC CONTROL SIGNAGE SHALL CONFORM TO THE STATE DEPARTMENT OF TRANSPORTATION STANDARD DETAIL SHEETS AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES. SIGNS SHALL BE INSTALLED PLUMB.
- INFORMATION ON EXISTING UTILITIES HAS BEEN COMPILED FROM AVAILABLE INFORMATION INCLUDING UTILITY COMPANY AND MUNICIPAL RECORD MAPS AND FIELD SURVEY AND IS NOT GUARANTEED CORRECT OR COMPLETE. UTILITIES ARE SHOWN TO ALERT THE CONTRACTOR TO THEIR PRESENCE AND THE CONTRACTOR IS SOLELY RESPONSIBLE FOR DETERMINING ACTUAL LOCATIONS AND ELEVATIONS OF ALL UTILITIES INCLUDING SERVICES. PRIOR TO DEMOLITION OR CONSTRUCTION, THE CONTRACTOR SHALL CONTACT THE PA ONE CALL SYSTEM WITHIN THREE (3) WORKING DAYS BEFORE COMMENCEMENT OF WORK AT 1-800-242-1776 AND VERIFY ALL LOCATIONS.
- FIRE LANES SHALL BE ESTABLISHED AND PROPERLY DESIGNATED IN ACCORDANCE WITH THE LOCAL MUNICIPALITY AND LOCAL FIRE DEPARTMENT REQUIREMENTS.

TICKET No.: 20240462759

**CALL BEFORE YOU DIG !**  
PENNSYLVANIA LAW REQUIRES  
3 WORKING DAYS NOTICE FOR  
CONSTRUCTION PHASE AND 10 WORKING  
DAYS IN DESIGN STAGE - STOP CALL  
PENNSYLVANIA ONE CALL SYSTEM, INC.  
 **1-800-242-1776**

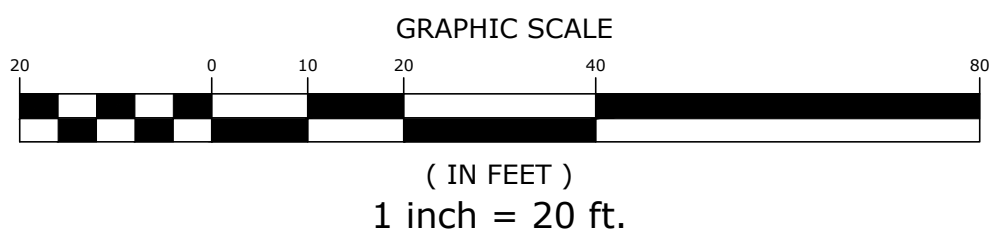

### PARKING REQUIREMENTS

PARKING STALL SIZE: 9.5' x 18' REQUIRED; 9.5' x 18' PROPOSED  
ONE (1) PARKING STALL PER 250 SQ. FT. OF GROSS FLOOR AREA.  
7,382 SF ÷ 250 SF = 29.52 (30) PARKING STALLS REQUIRED  
36 PARKING STALLS PROPOSED

### ZONING INFORMATION

LIMERICK TOWNSHIP  
ZONING DISTRICT: MS  
(MAIN STREET DISTRICT)  
THE RETAIL SALE OF AUTO PARTS IS A PERMITTED  
USE WITHIN THIS ZONING DISTRICT.

LIMERICK TOWNSHIP ZONING OFFICE  
646 WEST RIDGE PIKE  
LIMERICK, PA 19468  
610-495-6432


DESCRIPTION	REQUIRED	PROPOSED
MINIMUM LOT AREA	20,000 SF	58,613 SF (1.345 ACRES)
MINIMUM LOT WIDTH	100'	191.05'
MAXIMUM FRONT YARD SETBACK	100'	99'-2" NE, 99'-10" SE
MINIMUM FRONT YARD SETBACK	30'-0"	99'-2" NE, 99'-10" SE
MINIMUM SIDE YARD SETBACK	15'-0"	31'-3"
MINIMUM REAR YARD SETBACK	30'-0"	57'-11"
MAXIMUM BUILDING HEIGHT	35'-0"	23'-0"
MAXIMUM BUILDING GROSS FLOOR AREA	65,000 SF	7,382 SF
MAXIMUM BUILDING COVERAGE	20%	12.6%
MAXIMUM IMPERVIOUS COVERAGE	65%	57.5%
PARKING SETBACK - FRONT YARD	20'-0"	20'-0"
PARKING SETBACK - SIDE YARD	10'-0"	19'-8"
PARKING SETBACK - REAR YARD	10'-0"	30'-0"
PARKING SETBACK FROM BUILDING	10'-0"	10'-0"

### KEYNOTES


- PIPE GUARD - SEE DETAIL 11/C1.A.
- DUMPSTER LAYOUT - SEE DETAILS 13, 14, 15 & 16/C1.A.
- SERVICE DOOR - SEE DETAIL 10/C1.A.
- ASPHALT PAVING - SEE DETAILS 2 & 4/C1.A.
- CONCRETE PAVING - SEE DETAIL 3/C1.A. EXPANSION AND CONTROL JOINTS - SEE DETAILS 21 & 22/C1.A. MAXIMUM SPACING FOR CONTROL JOINTS IS 15' O.C. EACH WAY.
- G.C. TO PROVIDE ALTERNATE BID FOR CONCRETE PAVING, WHERE NOTED.
- CONCRETE LIGHT POLE BASE - SEE DETAIL ON PHOTOMETRIC LIGHTING PLAN. AIM LIGHT FIXTURE IN DIRECTION AS INDICATED.
- ROLL-OVER CURB @ CONCRETE PAVING - SEE DETAIL 1/C1.A.
- ROLL-OVER CURB @ ASPHALT PAVING - SEE DETAIL 2/C1.A.
- WHEEL STOP - SEE DETAIL 12/C1.A.
- CONSTRUCT 6" WIDE CONCRETE CURB AGAINST BUILDING AT ACCESSIBLE RAMP.
- FROST-PROOF YARD HYDRANT - SEE DETAIL ON SHEET P1.
- BOLLARD PLAN - SEE DETAIL 9/C1.A.
- BARRIER-FREE PARKING SYMBOL - SEE DETAIL 7/C1.A.
- 4" WIDE PARKING STRIPE PAINTED WHITE (TYP.).
- 4" WIDE DIAGONAL STRIPES PAINTED WHITE AT 2 FT. O.C. STRIPES AT ACCESSIBLE PARKING TO BE BLUE - SEE DETAIL 6/C1.A.
- ACCESSIBLE PARKING SIGN - SEE DETAIL 8/C1.A. G.C. TO PROVIDE ONE VAN ACCESSIBLE SIGN.
- CONCRETE SIDEWALK - SEE DETAILS 20 & 23/C1.A FOR SIDEWALKS AROUND BUILDING.
- ACCESSIBLE RAMP - SEE DETAILS 5 & 6/C1.A - MAX. SLOPE 1:12 (8.33%), MAX. CROSS SLOPE 1:50 (2.00%), TRUNCATED DOME TO BE A CONTRASTING COLOR.
- NEW LANDSCAPE AREA - PROVIDE 4" TOPSOIL & SOD. SEE SHEET L1.0 FOR ADDITIONAL INFORMATION.
- 5' x 8' x 20' O.A.H. PYLON SIGN. (UNDER SEPARATE PERMIT). ALL SIGNS SHALL BE PERMITTED IN ACCORDANCE WITH LIMERICK TOWNSHIP REGULATIONS.
- 5' x 5' CONCRETE PAD AT EXIT DOOR.
- LIMIT OF NEW PAVEMENT.
- FLUSH CURB TO PAVEMENT AT 4:1 SLOPE.
- CONCRETE PAD AND ABOVE-GROUND PROPANE TANK, PER PROPANE SUPPLIER REQUIREMENTS.
- 5'-0" WIDE x 4" THK. CONCRETE SIDEWALK WITH MAXIMUM 2% CROSS-SLOPE AND MAXIMUM 5% RUNNING SLOPE.
- 4' x 6' CONCRETE PAD WITH BICYCLE RACK. SEE DETAIL 25/C1.A.
- FIRE LANE SIGN. SEE DETAILS ON SHEET EM1.0.

### GENERAL NOTES

- PROOF ROLL BUILDING AND ALL PARKING AREAS. NOTIFY THE ARCHITECT OF ANY UNACCEPTABLE AREAS.
- EDGE OF NEW PAVEMENT TO BE FLUSH WITH EXISTING PAVEMENT.
- ALL SIDEWALK CURB AND GUTTER STREET PAVING, CURB CUTS, DRIVEWAY APPROACHES, HANDICAP RAMP, ETC. CONSTRUCTED OUTSIDE THE PROPERTY LINE IN THE RIGHT-OF-WAY SHALL CONFORM TO ALL MUNICIPAL AND/OR STATE SPECIFICATIONS AND REQUIREMENTS.
- FOR AREAS OUTSIDE THE PROPERTY LINES, REPAIR AND/OR REPLACE ALL DAMAGE DONE TO EXISTING ELEMENTS (SIDEWALKS, PAVING, LANDSCAPING, ETC.) AS REQUIRED BY OWNER AND/OR GOVERNING AUTHORITY.
- FOR PROPOSED UTILITY LOCATIONS, SEE THE SITE UTILITY PLAN.
- PROPOSED USE: RETAIL SALE OF AUTO PARTS.

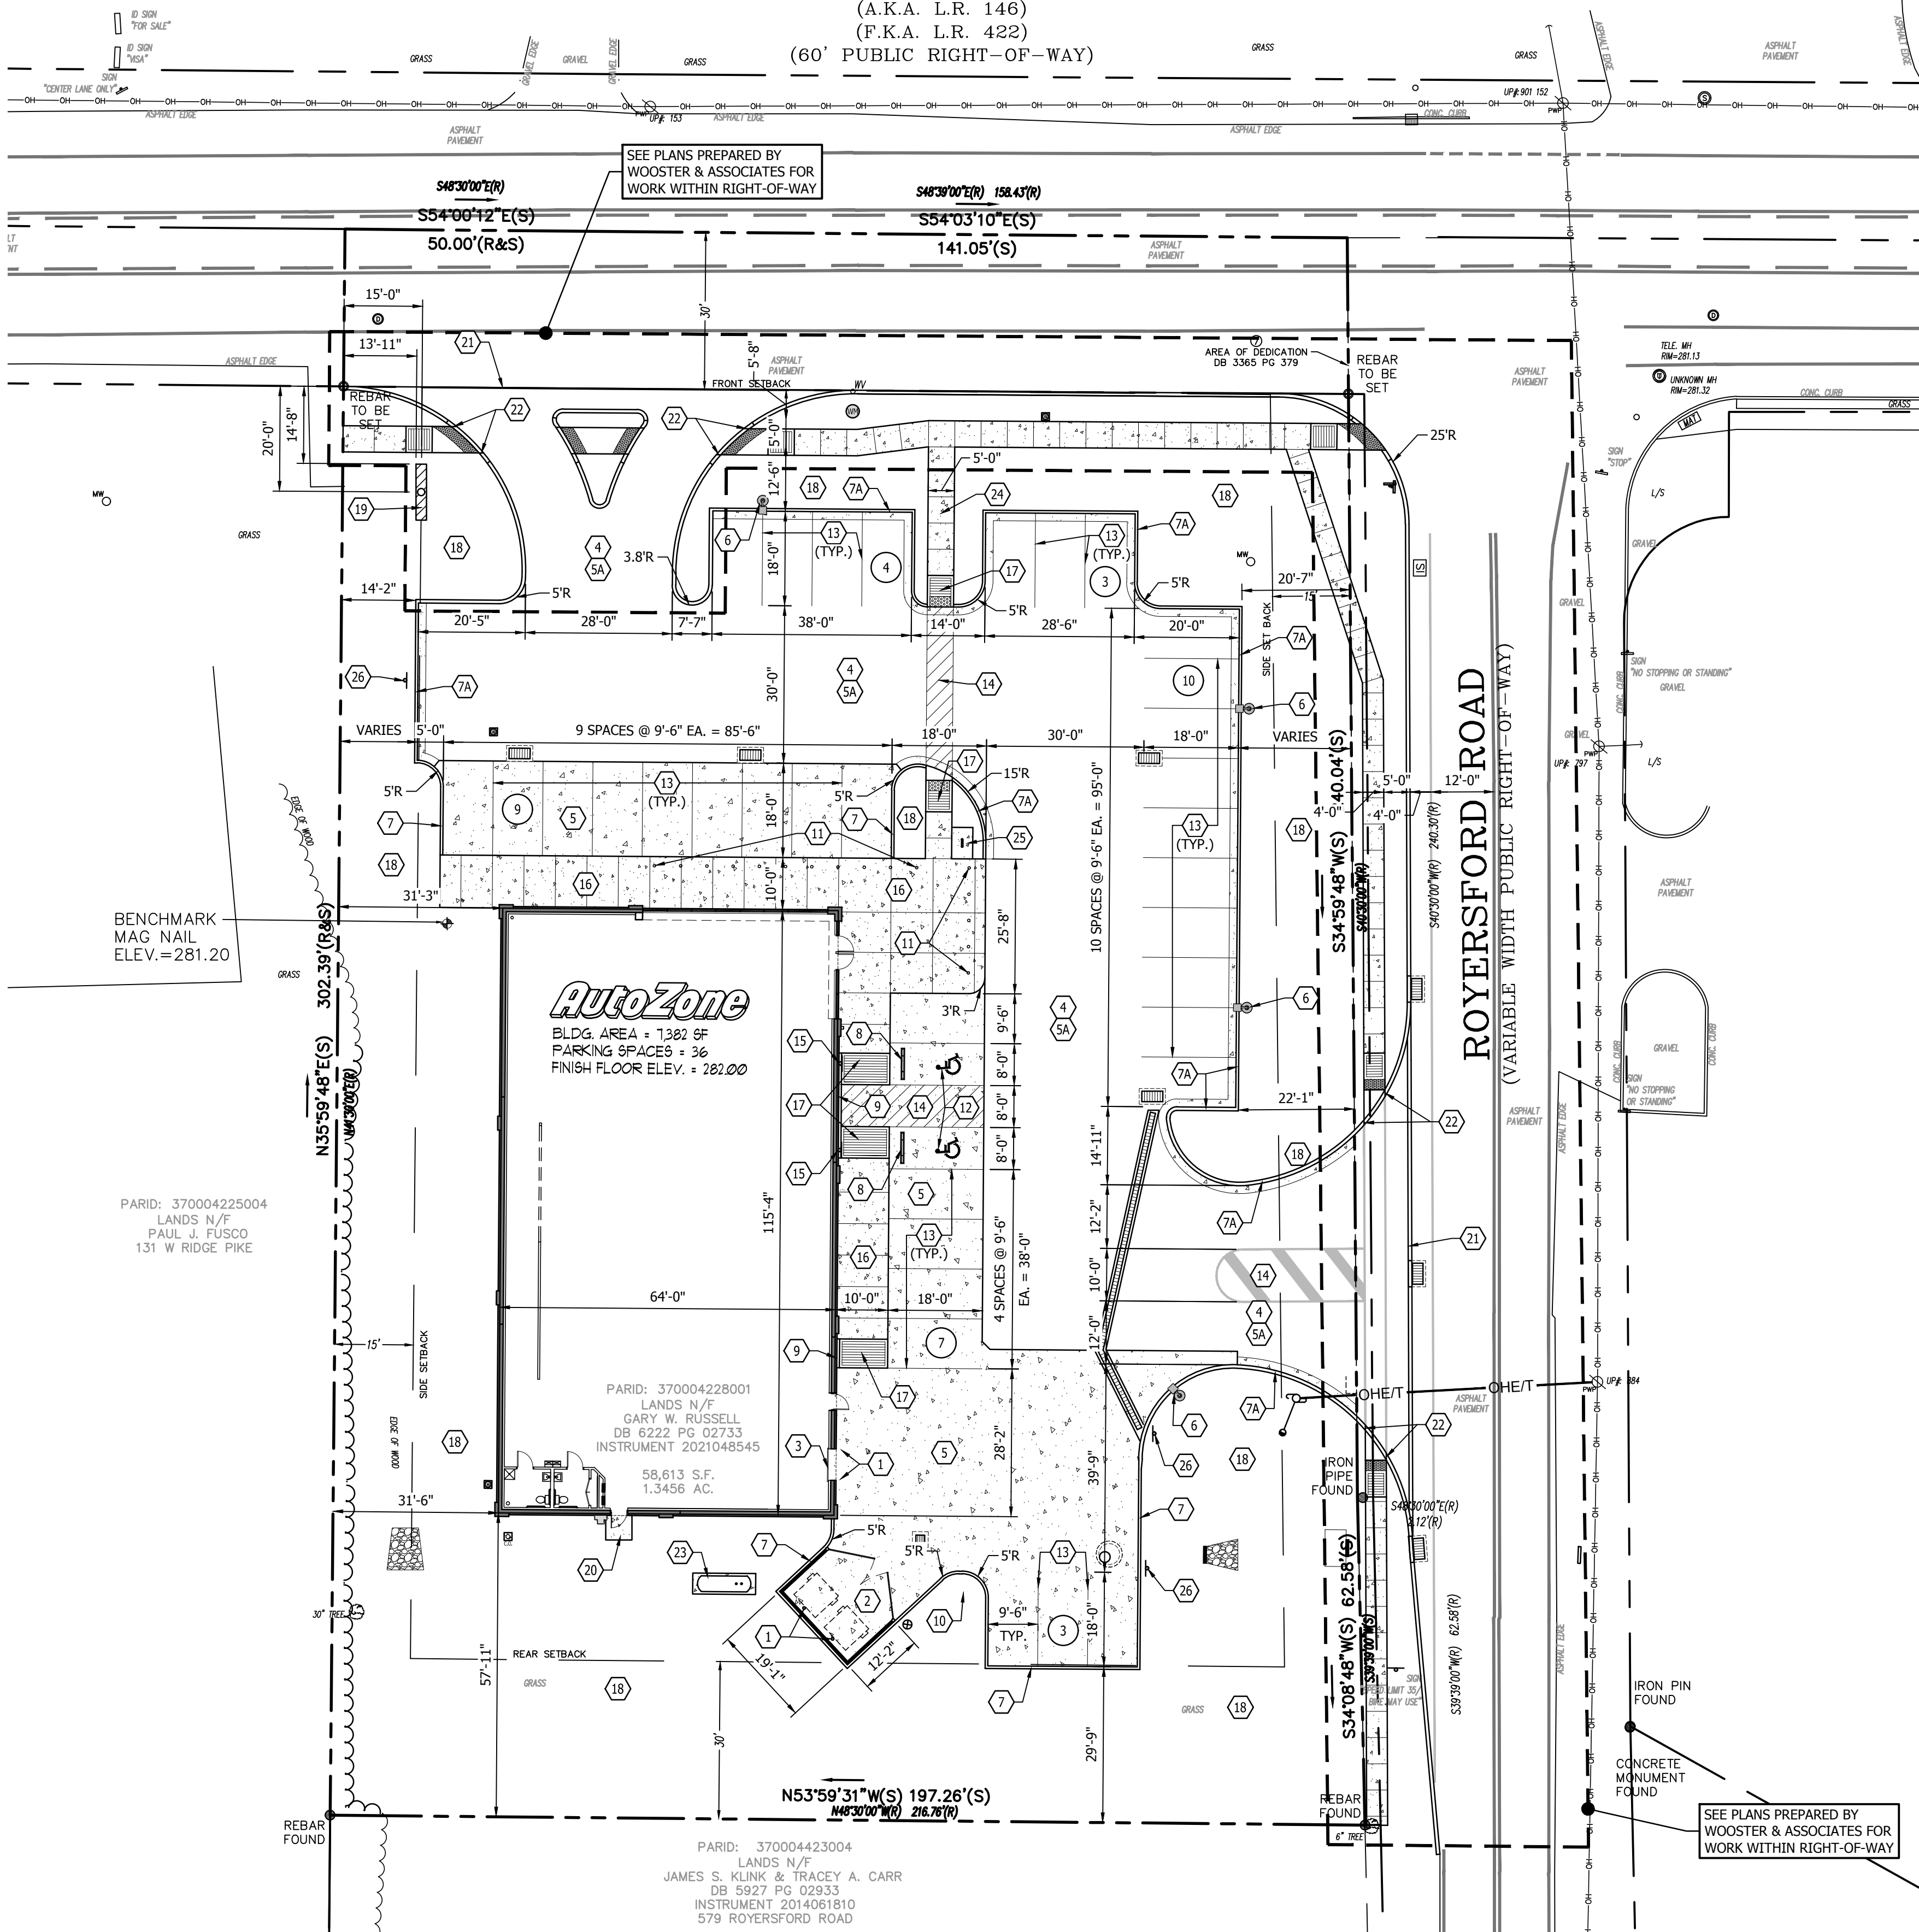

Owner / Developer:  
**AutoZone Development, LLC**  
123 South Front Street, 3rd Floor  
Memphis, Tennessee 38103  
Tel: (901) 495-8709 Fax: (901) 495-8969  
For Bidding & Contractor Information Contact:  
F.W. Dodge Plan Room Tel: (615) 884-1017

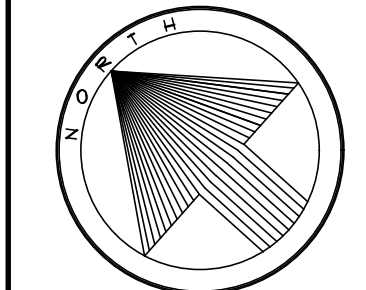

PREPARED FOR:  
**AutoZone**  
Store No.: 5970  
123 WEST RIDGE PIKE, LIMERICK, PA 19468  
TOWNSHIP OF LIMERICK, COUNTY OF MONTGOMERY  
COMMONWEALTH OF PENNSYLVANIA

### SITE PLAN

SCALE: 1" = 20'-0"

### REVISIONS

1.	
2.	
3.	
4.	
5.	
6.	
7.	
8.	

DRAFTSMAN: CWT  
CHECKED BY: CMP  
DATE  
8-25-2025  
PROTOTYPE SIZE  
7x2-R



**C1.0**  
Sheet 3 of 19